

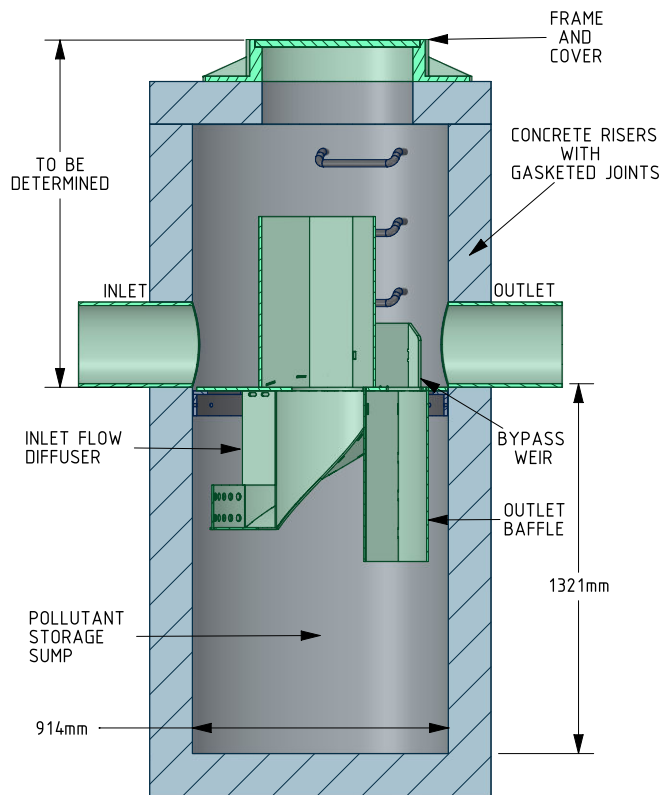


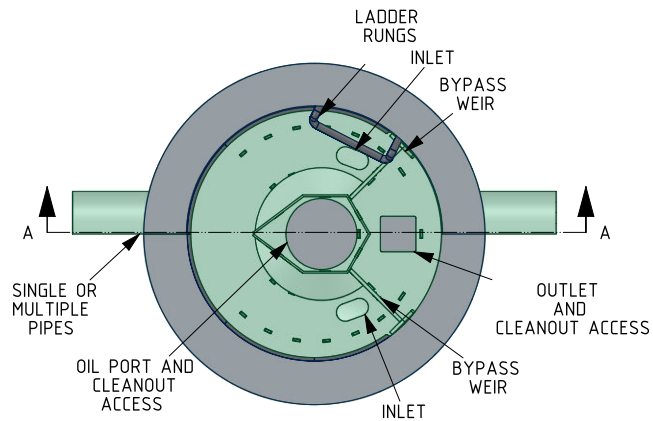

SECTION A-A

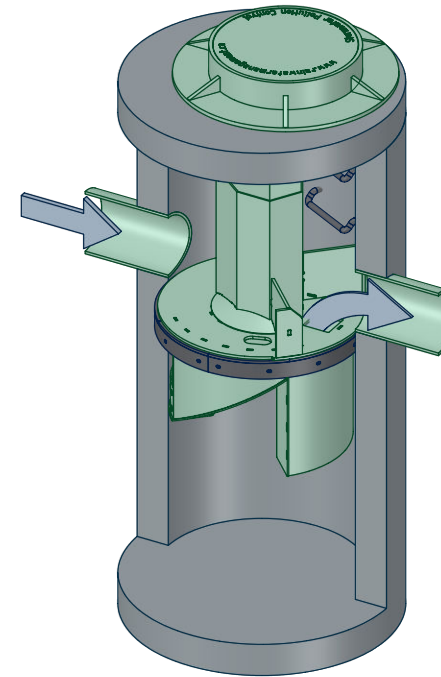

SCALE 1:32

TYPICAL DRAWING NOT FOR CONSTRUCTION

DESIGN NOTES

1. INLET AND OUTLET PIPE CAN BE UP TO 90 DEGREES APART DEPENDING ON PIPE AND MANHOLE SIZE. IF IN DOUBT, PLEASE CONTACT RAINWATER MANAGEMENT.
2. THE RWM DM UNIT CAN HANDLE MULTIPLE INLET PIPES AS WELL AS A TOP INLET.

GENERAL NOTES

1. RAINWATER MANAGEMENT TO PROVIDE ALL MATERIALS UNLESS NOTED OTHERWISE.
2. ALL DIMENSIONS ARE SHOWN IN MILLIMETERS.
3. FOR FABRICATION DRAWINGS WITH DETAILED STRUCTURE DIMENSIONS AND WEIGHTS, CONTACT RAINWATER MANAGEMENT. www.rainwatermanagement.ca
4. RWM WATER QUALITY STRUCTURE SHALL BE IN ACCORDANCE WITH ALL DESIGN DATA AND INFORMATION CONTAINED IN THIS DRAWING.
5. STRUCTURE AND CASTINGS SHALL MEET REQUIRED LOAD RATINGS, ASSUMING GROUNDWATER ELEVATION AT, OR BELOW THE OUTLET PIPE INVERT ELEVATION. ENGINEER OF RECORD TO CONFIRM ACTUAL GROUNDWATER ELEVATION.
6. MANHOLE MANUFACTURED TO LOCAL SPECIFICATIONS.

INSTALLATION NOTES

1. ANY SUB-BASE, BACKFILL DEPTH, AND/OR ANTI-FLOTATION PROVISIONS ARE SITE-SPECIFIC DESIGN CONSIDERATIONS AND SHALL BE SPECIFIED BY THE ENGINEER OF RECORD.
2. CONTRACTOR TO PROVIDE EQUIPMENT WITH SUFFICIENT LIFTING AND REACH CAPACITY TO LIFT AND SET THE MANHOLE STRUCTURE (LIFTING DEVICES NOT PROVIDED). HEAVIEST LIFT DEPENDS ON RISER HEIGHTS.
3. CONTRACTOR TO ADD GASKETS OR JOINT SEALANT BETWEEN ALL STRUCTURE SECTIONS, AND ASSEMBLE STRUCTURE AS REQUIRED.
4. CONTRACTOR TO PROVIDE, INSTALL, AND GROUT PIPES, MATCH PIPE INVERTS WITH ELEVATIONS SHOWN.
5. CONTRACTOR TO TAKE APPROPRIATE MEASURES TO ASSURE UNIT IS WATER TIGHT. IT IS SUGGESTED THAT ALL JOINTS BELOW PIPE INVERTS ARE GROUTED.

rainwater
MANAGEMENT

www.rainwatermanagment.ca
604-944-9265

FILE
RWM-DM-900 TYPICAL

JOB / IDENTIFIER
DM

MATERIAL
--

THICKNESS

MODEL
RWM-DM-900

REV
SCALE
1:27

CREATOR
AG

CREATED
9/30/2022

APPROVED

LAST SAVED
9/30/2022 9:11:20 AM

SHEET
1 of 1